



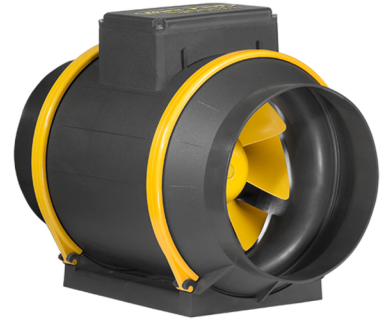

MAX-FAN PRO SERIES

TECHNICAL DATASHEET

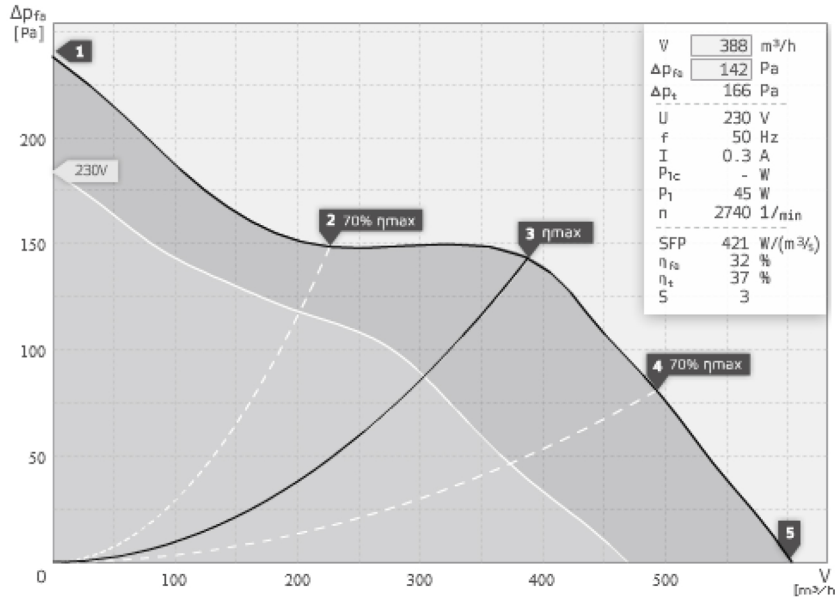

- Diagonal impeller with stator
- Plastic housing
- With 2-step switch
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P1	W	40	39	45	46	44
RPM n	1/min	2802	2815	2740	2737	2768
SPL inlet LWA5	dB(A)	68	68	69	69	70
SPL outlet LWA6	dB(A)	66	67	67	68	71
SPL casing break out LWA2	dB(A)	56	56	57	57	58

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	68	28	35	55	67	59	58	54	48
Outlet	LWA6	67	31	35	56	63	62	57	57	51
Casing	LWA2	56	36	30	41	55	49	48	39	28

Max Fan PS 150, 600, 2 speed 126546	
Voltage UN	230 V 1~
Current Imax	0,3
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,6 kg

