



LMA-T Cut Sheet



Features

- LED Indicator
- Plug & Play

Overview

TrolMaster's Hydro-x system can control most of the supplemental lighting fixtures sold today. Most light manufacturers provide the ability to control their lighting systems using what known as a low-volt control. That low-volt control can take many forms and communication protocols. TrolMaster makes several types of lighting adapters (LMA units) that allow the Hydro-x to control lights using their low-volt control option.

The LMA-T works specifically with the ThinkGrow LED systems to provide two channel control, which allows separate control for full spectrum and deep red output levels on the ThinkGrow LEDs.

The LMA-T simply connects to the lighting control ports Line 1 and Line 2 on the HCS-1. Once connected, the user can then set individual ON and OFF times and the dimming settings for the full spectrum LEDs and also for the deep red LEDs.

The LMA-T then is connected to the RJ type lighting control cables where each of the LEDs are connected back to the controller in a daisy-chain configuration using plug-and-play connections.

One adaptor could run up to 256 ThinkGrow LEDs.

* Convert RJ12 to Water Proof Connector Cable included.

T Product Specifications

Dimensional Diagram

Package Content

1x LMA-T
1x RJ12 to customized waterproof connector

Input Voltage

12V

Maximum Current

0.2A

Working Environment


Temperature 32-122°F, Humidity<90%

Packaging Dimensions

156mm(L) x 83mm(W) x 30mm(H)

G.W. per pack

0.17kgs

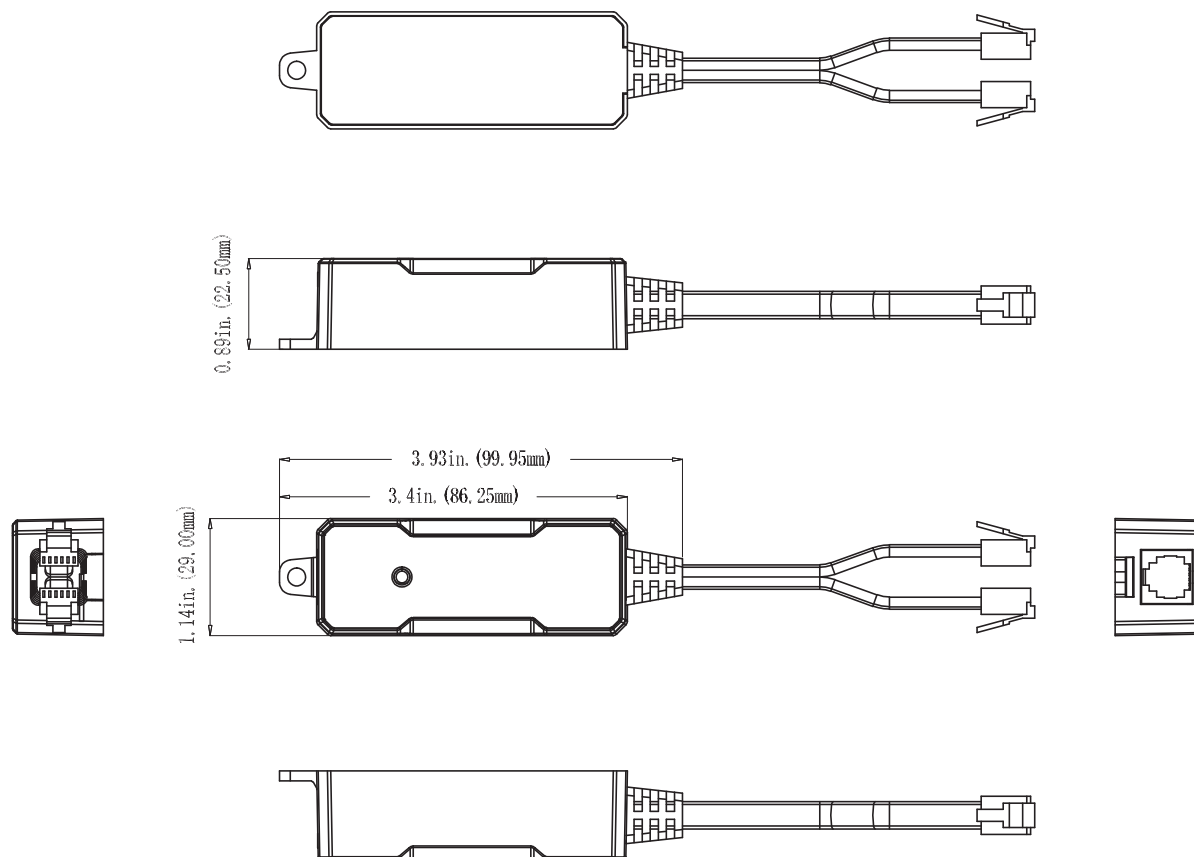

Tech Support
Phone : 877-420-9876
Email : support@trolmaster.com



CONFORMS TO
UL STD.61010-1
CERTIFIED TO CSA STD.
C22.2#61010-1